



**Aga Khan Rural Support Program (AKRSP)
REQUEST FOR QUOTATION (RFQ)**

RFQ No: **Delivery Point:** Khot and Boroghul Valley
RFQ Date: July 01, 2025 **Submission Date:** July 14, 2025

Subject: Request for Quotation

The Aga Khan Rural Support Programme (AKRSP) invites sealed quotations from qualified and experienced vendors for the Supply, Transportation, and Installation of Aluminum Glasses, CGI Sheets, and Thermopore Sheets for Passive Solar Greenhouse Projects at various locations across Upper and Lower Chitral.

This RFQ outlines the scope of supply and services, terms and conditions, and evaluation criteria. Vendors are requested to thoroughly review the requirements and submit quotations in compliance with the specifications herein. Any clarifications needed should be requested within the specified timeline.

Terms & Conditions for Submission of Sealed Quotations:

Submission Requirements: Quotations must be submitted on the company/organization's official letterhead with a date, signature, and stamp.

Compliance and Evaluation: Quotations must meet all specifications, requirements, and offer the lowest price along with fulfilling other evaluation criteria. Non-compliant offers will be rejected.

Price Calculation: Any discrepancies between unit prices and total prices will be recalculated by AKRSP, with the unit price prevailing. Suppliers must accept the corrected total price to avoid rejection.

Price Variation: No price variations due to market factors will be accepted after quotation submission. AKRSP reserves the right to adjust the quantity without changing unit prices or terms at the time of awarding the contract.

Non-Binding: AKRSP is not obligated to accept any quotation or award a contract. Suppliers are responsible for all costs associated with quotation preparation and submission.

Conflict of Interest: AKRSP emphasizes transparency and integrity. Vendors must disclose any conflicts of interest, including direct or indirect involvement of the vendor or its affiliates in preparing RFQ details. This ensures a fair process. We maintain zero tolerance for fraud and unethical practices, committed to upholding honesty, accountability, and compliance with our vendors.

Transportation Responsibility: Suppliers are responsible for safely transporting all materials to the project site.

Travel and Accommodation: Suppliers must arrange their travel, accommodation, and meals during the supply and Transportation period.

Design Compliance: All supplied items must adhere to approved and reliable design standards.

Inspection and Rejection: Materials will undergo inspection either at Chitral or the project site. Deviations from specified specifications can lead to material rejection, with the supplier bearing replacement costs.

Evaluation Criteria: The evaluation process will include a thorough financial assessment of the bids. The contract will be awarded to the bidder with the lowest bid price, provided they meet all the requirements specified in the RFQ document.

Payment Terms: Payments will be made in three instalments:

- 50% percent of the payment will be made after the delivery of materials to Chitral, following inspection by AKRSP's technical team.
- 40% percent of the payment will be made after the delivery of all materials to the work site.
- 10% percent payment will be made after the completion of installation works.

Taxes: Quoted prices should be inclusive of all taxes.

Rate Discrepancies: Significant rate differences between quoted and market rate may lead to procurement cancellation, and cartelization will result in backlisting. The same entity or individual can't submit quotations under a different name.

Validity Period: Quoted rates should remain valid for at least one month.

Cancellation Rights: AKRSP reserves the right to cancel the procurement process at any stage without specifying reasons.

Delivery & Installation Timeline: Services must be delivered within 60 days of agreement signing.

Submission Deadline: Sealed quotations must be submitted by hand or courier to Regional Office AKRSP near Shahi Qilla Chitral by **COB July 14, 2025**.

Admin & Procurement Officer
AKRSP

Vendor Receipt & Acknowledgement

Name: _____

Designation: _____

Sign & Stamp

Description of Works: Supply, Transportation & Installation of Aluminum & Glasses in Greenhouse and Supply of CGI Sheets & Thermopore Sheets in various valleys of Chitral.

BOQ for one Greenhouse of (60'x15') Size

S. No.	Description	Specifications	Unit	Qty	Rate (Rs)	Amount (Rs)
1	Vertical Border	D54A 2mm	rft	22.0		
2	Horizontal Border	D54 A 2mm	rft	112.0		
3	Vertical Divider	D59 1.6mm	rft	220.0		
4	Horizontal Divider	D59 1.6mm	rft	112.0		
5	Supporting Pipe	2"x1"	rft	100.0		
6	Bedding	D41	rft	630.0		
	Angle	1.5"x1.5" size thickness 3mm	rft	24		
8	Glasses	Thickness=5mm Length=3.5-ft, width=2.5-ft Total No=70	sft	612.50		
9	Rubber Packing	PVC Super fix	rft	630.0		
10	Silicon		No	16.0		
11	Thermometer/Hygrometer	Analog indicator indoor outdoor thermometer Hygrometer L15	No	1		
12	Installation Cost of Aluminum & Glasses Only	Lumpsum	No	1		
13	Supply of CGI Sheets and accessories	Gauge: 30, Thickness: 0.31 mm, Size: 9'x3.5' Weight per sheet: 8 kg Cup washers and nails: 5 kg	No	19		
14	Supply of Thermopore Sheets	Size: 4'x4', Thickness: 12 mm, Color: white, TP D-24	No	24		
13	Transportation Cost of all items listed above to the below mentioned locations	Average cost	No	1		
	Total Amount					

Locations of 60'x15' size Greenhouses

Chitral Valleys	Physical Targets	Distance from Chitral (km)
Khot (Khot Bala)	01	150


BOQ for one Greenhouse of (30'x15') size


S. No.	Description	Specifications	Unit	Qty	Rate (Rs)	Amount (Rs)
1	Vertical Border	D54A 2mm	rft	22.0		
2	Horizontal Border	D54 A 2mm	rft	52.0		
3	Vertical Divider	D59 1.6mm	rft	220.0		
4	Horizontal Divider	D59 1.6mm	rft	52.0		
5	Supporting Pipe	2"x1"	rft	100.0		
6	Bedding	D41	rft	330.0		
8	Glasses	Thickness=5mm Length=3.5-ft, Width=2.5-ft Total No=37	sft	323.75		
9	Rubber packings	PVC Super fix	rft	330		
10	Silicon		No	16		
11	Thermometer/Hygrometer	Analog indicator indoor outdoor thermometer Hygrometer L15	No	1		
12	Installation Cost Aluminum And Glasses only	Lumpsum	No	1		
13	Supply of CGI Sheets and accessories	Gauge: 30, Thickness: 0.31 mm, Size: 9'x3.5' Weight per sheet: 8 kg Cup washers and nails: 5 kg	No	10		
14	Supply of Thermopore Sheets	Size: 4'x4', Thickness: 12 mm, Color: white, TP D-24	No	24		
15	Transportation Cost of all items listed above to the below mentioned locations	Average cost	No	1		
	Total Amount					

Locations of 30'x15' size Greenhouses

Chitral Valleys	Physical Targets	Distance from Chitral (km)
Upper Yarkhoon Boroghul (Kankhoon, Inchipon, Maidan)	03	250
Total	03	

Diagrams of 60'x15' size Greenhouse

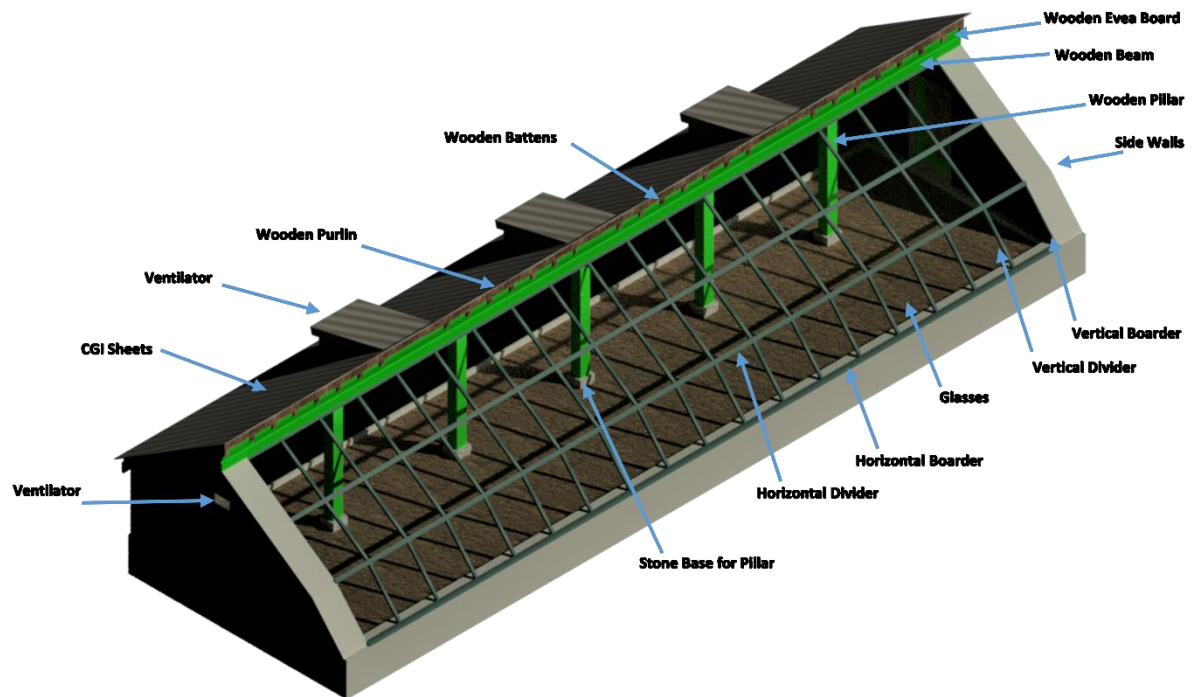

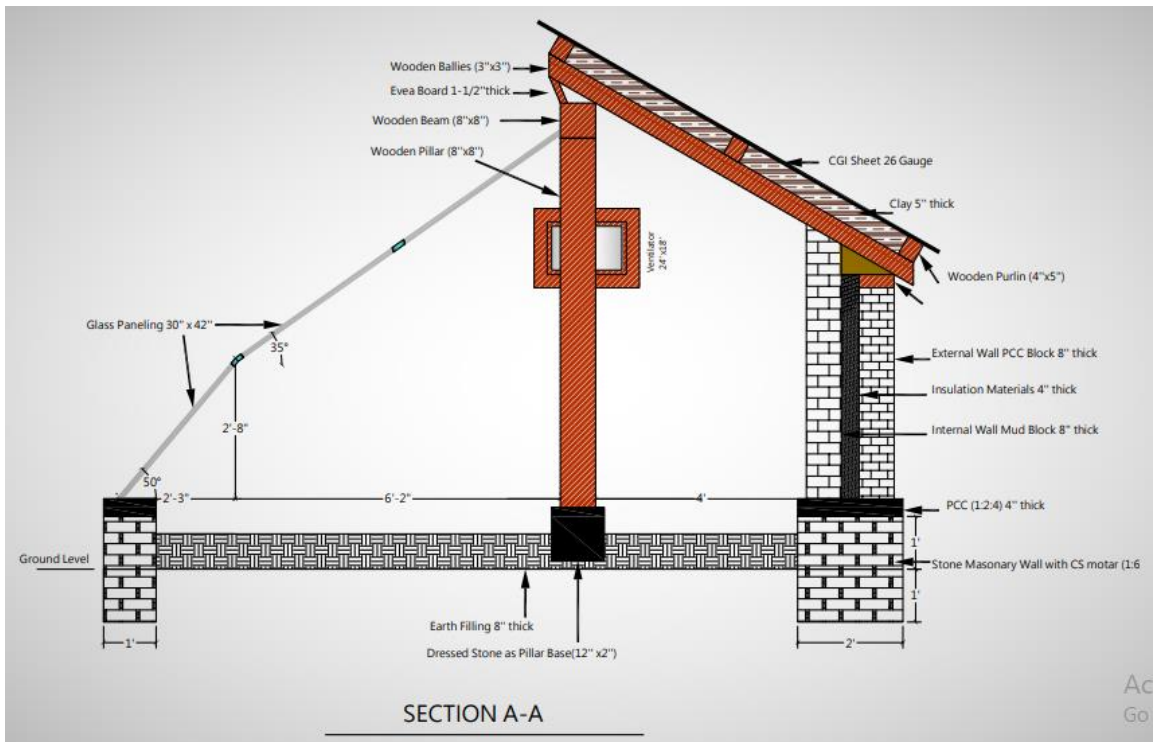

Picture of Thermometer/Hygrometer

